



1	2	3	4	5	6	7	8				
CUSTOMER	CUST P/N	FREEDPORT P/N			REV.	ZONE	LTR	DESCRIPTION	DATE	REVISOR	APPD
ALL		18-9413****	RoHS Compliant								

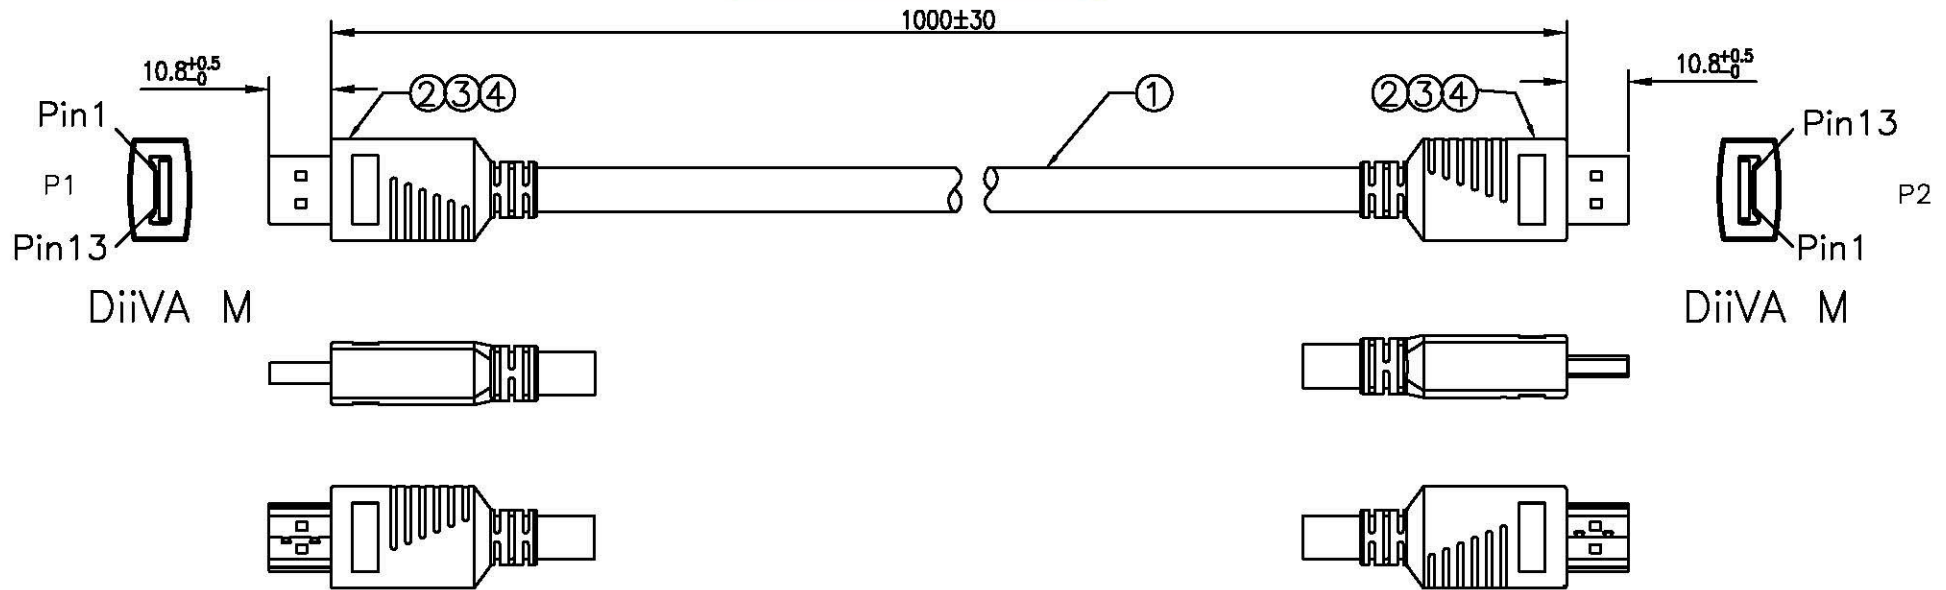

PIN ASSIGNMENT:

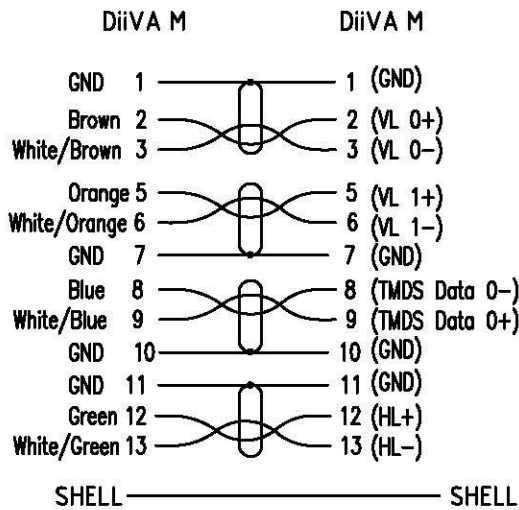

ELECTRICAL CHARACTER:

- 100% OPEN&SHORT TEST
- HI-POT:AC300V 10ms
- Insulation Resistance:10 MOHM MIN
- Contact Resistance: 2 OHM MAX

4	PVC	PVC 70P BLACK	
3	PE	PE LOW DENSITY	
2	CONN	DIIVA CONN SOLDER BLACK G/F SHELL NI - PLATED	
1	DiVA CABLE	UL20276 (1P*28#+D+AL+Mylar)*4C +AL.Mylar +D+B PVC JACKET BLACK	
NO.	PART NAME	SPEC DESCRIPTION	REMARK
INNERMOLD		Tolerance unless specified .0 0 0 .0 0 .0	 <small>www.allconnectors.com info@allconnectors.com Tel: 0049 744 7000000 Fax: 0049 744 7000001 Pötz+Pflüger GmbH - Germany Reutemühlstr. 22</small>
M1D1013MON00	ANGLE	 SCALE NON UNIT MM	
OVERMOLD		DRAW	NAME DiVA CABLE 28AWG SHEET 1/1
		DESIGNER	
		CHECKED	
		APPROVED	
M2D1013MON00		DRAWING NO. 18-9413**** REV. 0.1	