

REVISION DATA			
ITEM	DESCRIPTION	DATE	REMARK
B			



2. 54*2. 54mm (0. 100"*0. 100") FEMALE HEADER, DUAL ROW, STRAIGHT

H=8. 5+2. 5mm

SPECIFICATIONS

Current Rating: 3AMP
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Withstand Voltage: 1000V AC/minute
Operation Temperature: -40℃to+105℃

Contact: Brass
plating: Au or Sn Over 50u" Ni
Insulator: High Temperature Thermoplastic
UL94V-0 Rated
Standard: PBT+30%G. F

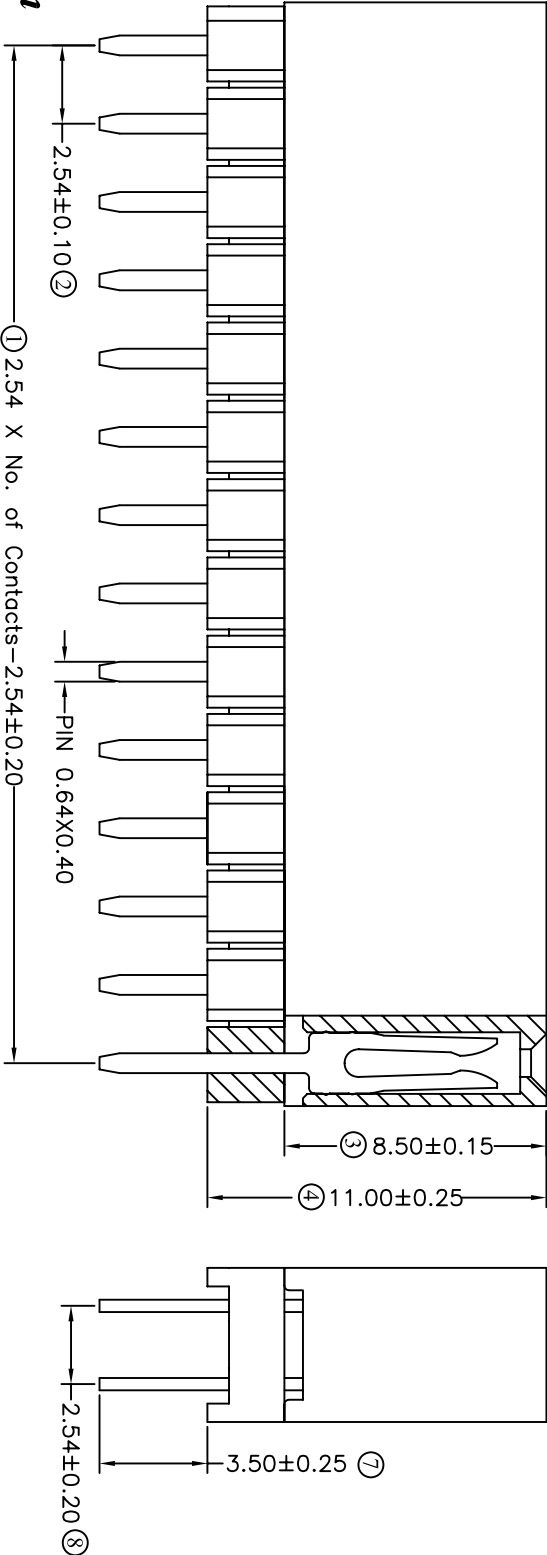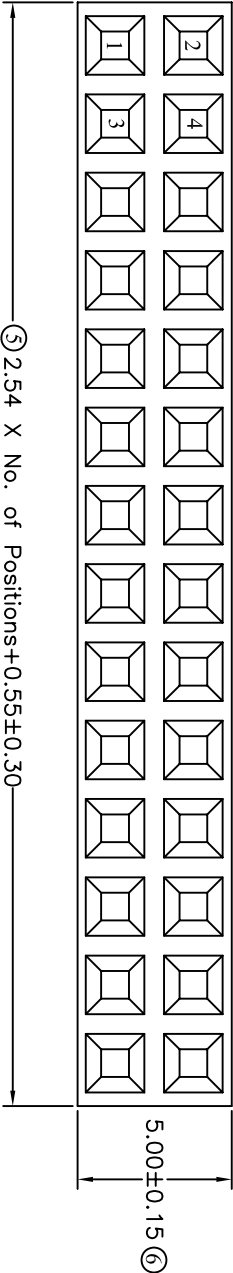


Ordering Information

FAS2852 - XX XX A 01 A1B X

No. of Pins per Row
01~40
Contact Plating
01=Gold Flash
04=Tin
Duplex Plating
06=Gold Flash/Tin(100u")

Options
A=BAG
B=TRAY
C=TUBE
D=TAPE REEL

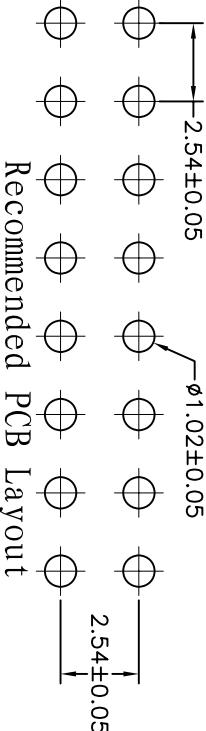

Recommended PCB Layout

All connectors	绘图 (DRAWN)		周 礼 青		投影 (PROJECT)		公差 (TOLERANCE)		料 号 (PART NO)		页 次 (PAGE)	
	审核 (CHECKED)				单位 (UNIT)		MM		图 号 (DRAW NO)		1 / 1	
www.allconnectors.eu info@allconnectors.eu Tel. +49 (0)711 / 358 110 20 Fax +49 (0)711 / 358 110 25	核准 (APPROVE)				比例 (SCALE)		1:1		FAS2852-A01A1B			
					版本 (EDITION)		A		品 名 (NAME)		2. 54双排母 180度 H=8. 50+2. 50	
					日期 (DATE)		2008.10.23					