

2.54mm F.P.C. CONNECTOR Housing

HOUSING PART NO:3816H

Material:

Material: NYlon66, UL 94V-0

Pole : 2~28P

Accepts Terminal : 3808PS-XX

SPECIFICATIONS






Current rating: 2A AC, DC

Voltage rating: 250V AC, DC

Temperature range: -25°C~+85°C

Insulation resistance: 1000m min

| N | DIM | | N | DIM | |
|-----|-------|-------|-----|-------|-------|
| | A | B | | A | B |
| 2P | 5.08 | 2.54 | 16P | 40.64 | 38.10 |
| 3P | 7.62 | 5.08 | 17P | 43.18 | 40.64 |
| 4P | 10.16 | 7.62 | 18P | 45.72 | 43.18 |
| 5P | 12.70 | 10.16 | 19P | 48.26 | 45.72 |
| 6P | 15.24 | 12.70 | 20P | 50.80 | 48.26 |
| 7P | 17.78 | 15.24 | 21P | 53.34 | 50.80 |
| 8P | 20.32 | 17.78 | 22P | 55.88 | 53.34 |
| 9P | 22.86 | 20.32 | 23P | 58.42 | 55.88 |
| 10P | 25.40 | 22.86 | 24P | 60.96 | 58.42 |
| 11P | 27.94 | 25.40 | 25P | 63.50 | 60.96 |
| 12P | 30.48 | 27.94 | 26P | 66.04 | 63.50 |
| 13P | 33.02 | 30.48 | 27P | 68.58 | 66.04 |
| 14P | 35.56 | 33.02 | 28P | 71.12 | 68.58 |
| 15P | 38.10 | 35.56 | | | |

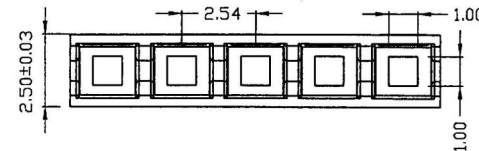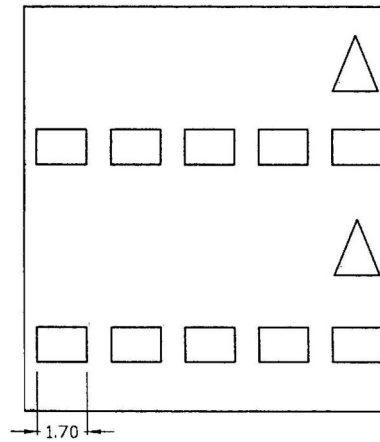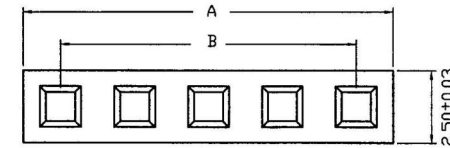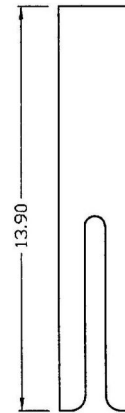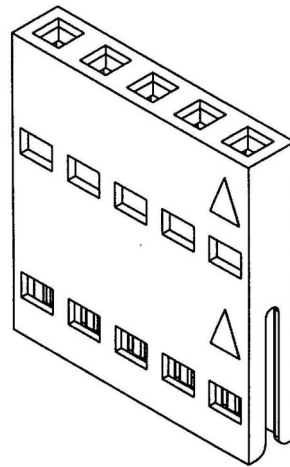

Allconnectors

www.allconnectors.de
Tel.: 0049 711 7009503
70734 Filzderstadt - Germany

info@allconnectors.de
Fax: 0049 711 7009504
Kettenerstr. 25

| | | | | | | | |
|-------------------------|------------|---------------|-----|----------------|-------|-------------------|------------|
| RECORD OF REVISION/修定内容 | REV.BY/修定者 | REV.DATE/修定日期 | 版別 | PART NO./料號 | 3816H | APPROVED BY/核准 | Davidson |
| | | | | MATERIAL/材質 | | CHECKED BY/審查 | 田正仁 |
| | | | | TREATMENT/表面處理 | | DRAWN/製圖 | 邱正義 |
| | | | | CUSTOMER/客戶品名 | | DATE/製圖日期 | 2010"09.29 |
| | | | A-1 | UNIT/單位 | mm | SCALE/比例 | 1:1 |
| | | | | | | DRAWING TYPE/圖面種類 | |

2010.10.01