


■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 7A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000M min
- Temperature range: -85°C~+105°C
- Contact resistance: Intial value/10m max
- After enviornmental testing/20m max

■ WAFER

- Part No.: MF-9359F-2*XX
- Poles: 2-24
- Material: Nylon 66 UL 94V-2 or UL 94V-0
- Q'ty: 1000pcs/bag

Poles	Part No	Dimensions (mm)	
		A	B
2	9359F-2*01	6.20	--
4	9359F-2*02	10.40	4.20
6	9359F-2*03	14.60	8.40
8	9359F-2*04	18.80	12.60
10	9359F-2*05	23.20	16.80
12	9359F-2*06	27.20	21.00
14	9359F-2*07	31.40	25.20
16	9359F-2*08	35.60	29.40
18	9359F-2*09	39.80	33.60
20	9359F-2*10	44.00	37.80
22	9359F-2*11	48.20	42.00
24	9359F-2*12	52.40	46.20

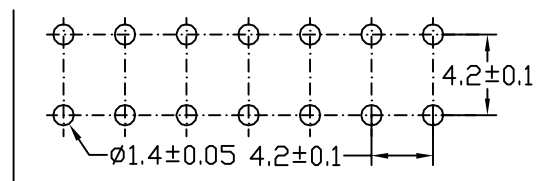

P.C.B. RECOMMENDED LAYOUT

APPROVED BY	DATE	SCALE	TOLERANCE	
	2007/05/08	4:1	.0	±0.3
CHECKED BY	UNIT	VIEW	.00	±0.2
	mm	⊕ ⊞	.000	±0.1
DRAWN BY	VER NO.	SIZE	.0	±
	D1	A1	.0	±