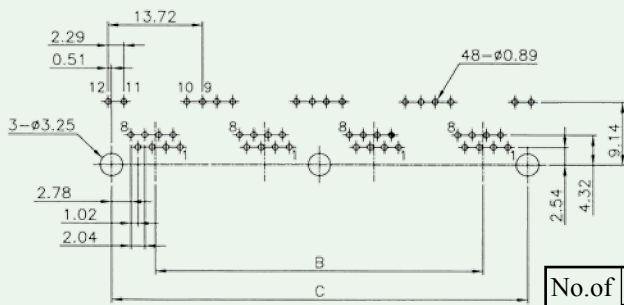# With LED PCB Jack
(Side Entry, Multi-Port, UTP)

PCB Layout / Top View

LED Schematic

Typical For Single Color LED (Red, Green, Yellow)

Typical For Bi-Color LED
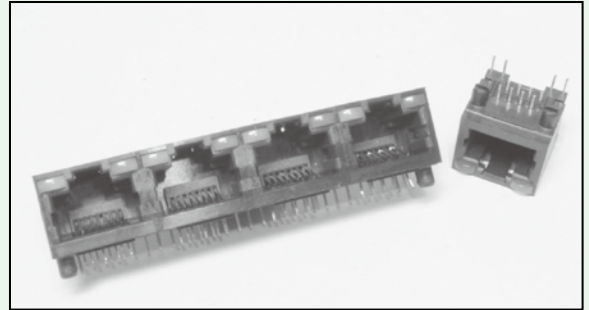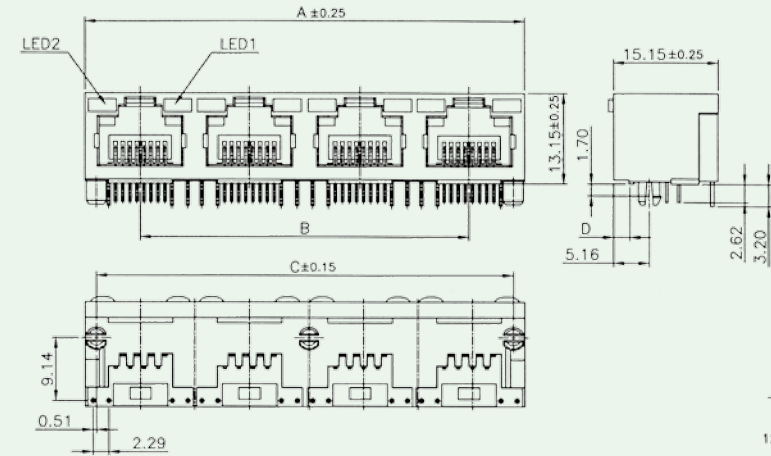
No.of Ports	Dimensions			
	A	B	C	D
1	15.91		12.70	2.25
2	31.66	15.75	28.45	2.37
4	63.16	47.25	59.94	2.37
6	94.66	78.75	91.45	2.37
8	126.16	110.25	122.94	2.37

Code	LED 2 (LEFT)	LED 1 (RIGHT)
0	No LED	No LED
1	Yellow	Green
2	No LED	Green
3	Green	Yellow
4	Green	Green
5	Yellow	Yellow
6	Yellow / Green	Yellow / Green
7	Green / Red	Green / Red
8	Yellow / Green	Yellow

Materials

- **Housing** : Engineering Thermoplastic.
  Flammability Rating UL 94V-0.
- **Contacts** : Phosphor Bronze.
- **Plating** : Gold Plating Over Nickel In Contact Area.
  Tin Plating Over Nickel In Solder Area.

Ordering Information

3046 - ☐ ☐ ☐ ☐ ☐

Series No.

No. Of Ports
01 = 1 Port
02 = 2 Ports
04 = 4 Ports
06 = 6 Ports
08 = 8 Ports

No. Of Positions
6, 8 or 10

No. Of Contacts
2, 4, 6, 8 or 10

LED Code Options As Above

Gold Plating Options
0 = Gold Flash
1 = 6μ"
2 = 15μ"
3 = 30μ"
4 = 50μ"