

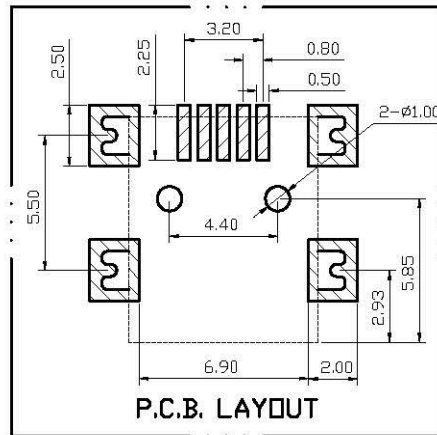
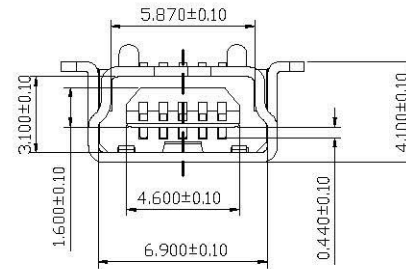
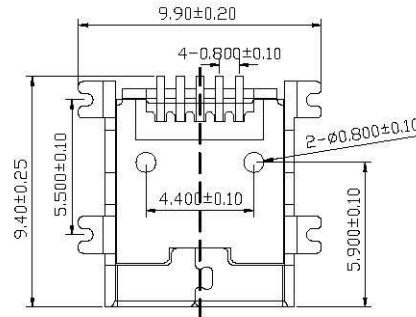
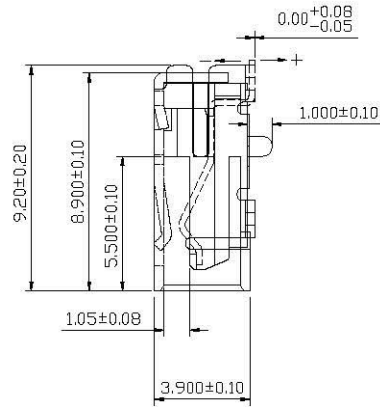


*1*表示鍍殼為 K7料



Note:

1.Material:

- 1.1 Insulator: LCP UL 94-V0 rated.
- 1.2 Contact: Phosphor bronze, t=0.25mm.
- 1.3 Shell: K7, t=0.4mm.

2.specification:

- 2.1 Current rating:1A MAX.
- 2.2 Dielectric withstanding voltage:500 v(ac) far minuta.
- 2.3 Contact resistance: 30 mΩ max.
- 2.4 Insulation resistance: 1000 MΩ min at DC 500V.
- 2.5 Total mating force: 3.57 kgf max.
- 2.6 Total unmating force: 0.71 kgf min.
- 2.7 Temperature range: -55°C~+105°C.

3.Finishes:

- 3.1 Contacts: a:半金霧錫,鍍底50-80u", 霧錫100-120u", 金 1u".3u".5u".10u".15u".30u".
b:半金錫,鍍底50-80u", 錫100-120u", 金 .1u".3u".5u".10u".15u".30u"
- 3.2 Shell: 先打鋼底50-80u",再鍍鍍80-120u".

3	SHELL	1	K7	T=0.40±0.02mm	Nickel Plated	0366XX-F
2	CONTACT	5	Phosphor Bronze	T=0.25±0.02mm	Gold Flashed	A3650XX
1	HOUSING	1	LCP		Black	JCH0002
No.	Part Name	Q'ty	Material	Thickness	Finish	Notes

RoHS Compliant


All Connectors

www.allconnectors.de
Tel.: 0049 711 7009503
70794 Filderstadt - Germany

info@allconnectors.de
Fax: 0049 711 7009504
Kettnerstr. 25

DRAWING BY CY
CHECKED BY GENIUS
UNIT / mm SCALE 1 : 1
DATE
SIZE A4 PPROJECTION

TOLERANCES ARE
X ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

MSB-SWC-5B-LF
SERIES | LEADFREE
| 5 PIN B TYPE
| MYLAR
| 90°SMT
FEMALE

DESCRIPTION: MINI-U.S.B 5P B FEMALE S.M.T