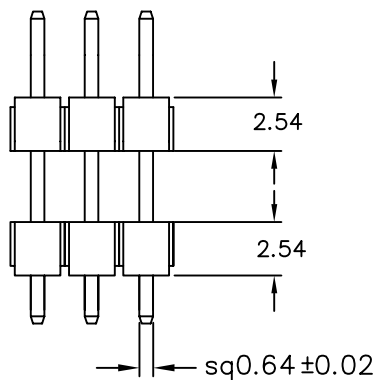
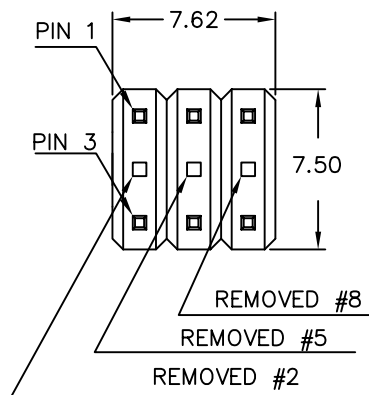


Recommended P.C.B Layout

MATERIAL

Housing : Thermoplastic UL94V-0

Contact Pin : Brass

SPECIFICATION


Current Rate : 3 AMP

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute

Operation Temperature : -55°C to + 105°C

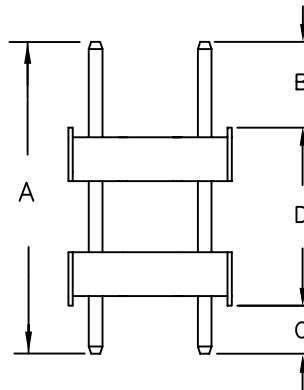

HSB-D2375928-3X03EB-LF
LEADFREE

RoHS Compliant

A: 23.70mm B: 2.80mm C: 5.90mm D: 15.00mm

All Connectors

www.allconnectors.eu | info@allconnectors.eu
Tel. +49 (0)711 / 358 110 20 | Fax +49 (0)711 / 358 110 25

PART NO. HSB-D2375928-3X03EB

DWG NO. HSB-D2375928-3X03EB

FILE NO.


UNIT / mm

SCALE 1:1

APPROVED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.3
.XX ± 0.2
.XXX
AWG

DESCRIPTION:

PIN HEADER 2.54*2.54mm
STRAIGHT STACK

AREA

REVISIONS

HK

DATE