



ELTSM-4

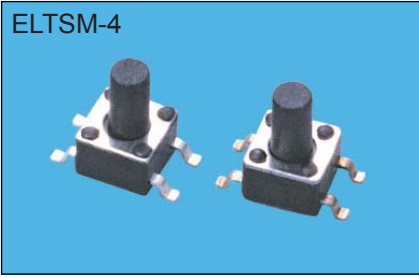



SPECIFICATIONS

RATING: 50mA, 12VDC
 ELECTRICAL LIFE: 30,000~50,000 cycles
 CONTACT RESISTANCE: 500mΩ max
 INSULATION RESISTANCE: 100MΩ min. 100VDC
 DIELECTRIC STRENGTH: 250VAC/1 min
 OPERATION FORCE: 260 ± 70g
 160 ± 50g
 STORAGE TEMPERATURE: -30 °C to +80 °C
 CONTACT ARRANGEMENT: 1 pole 1 throw


DIMENSION

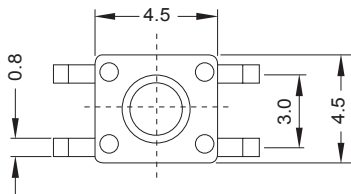


Model No.	H
ELTSM-41	3.8
ELTSM-433	7.0

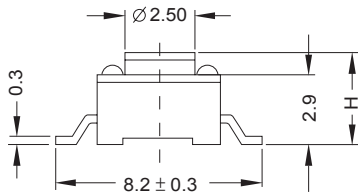

Circuit Diagram



P.C.B Layout

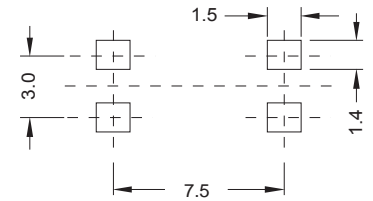

HOW TO ORDER

ELTSM — 4 [] [] — [] — []

Surface Mounting Type

Prod Size: 4.5 x 4.5

Package Style:
T/R: Tape & Reel

Operation Force:
N = 160g
R = 260g

Dimension H:

Code	ELTSM-4
1	3.8
33	7.0

RoHS code
H= RoHS Compliant