

Specification of connector

General Characteristics


Locking system : snap-in
 Termination : crimp moulded
 Shell protection : IP67

Electronical Characteristics

Rated voltage : 250V
 Rated current : 10A
 Contact resistance : $\leq 10\text{m}\Omega$
 Insulation resistance : $>10\text{M}\Omega$

Materials

Pin contact : brass
 Contact plating : gold
 Male insert : PA

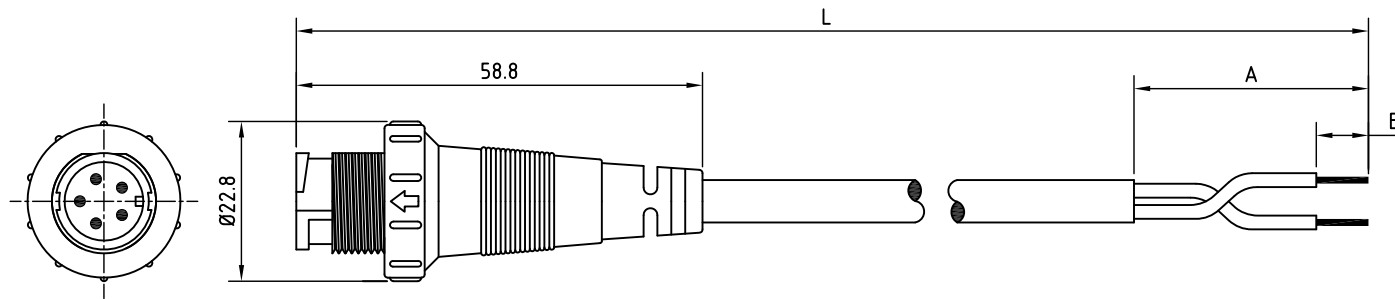

Specification of cable

Material Jacket	PVC	PUR
-----------------	-----	-----

RoHS
 LEAD FREE

CONTACT ARRANGEMENT FRONT VIEW				
	2P	3P	4P	5P

Allconnectors

www.allconnectors.eu | info@allconnectors.eu
 Tel. +49 (0)711 / 358 110 20 | Fax +49 (0)711 / 358 110 25

DATE	06-23-2011	PART NO.	D208M1.6-XP
DWN	GINA	REV.	1
CHK	KATY		
PART NO.	CIRCULAR CONNECTOR TYPE B	UNIT	MM