

Specification of connector

General Characteristics

| | |
|-------------------|-----------------|
| Locking system | : snap-in |
| Termination | : crimp moulded |
| Shell protection | : IP67 |
| Upper temperature | : 105°C |
| Lower temperature | : -40°C |

Electronical Characteristics


| | |
|-----------------------|---------------------------|
| Rated voltage | : 250V |
| Rated current | : 5A |
| Contact resistance | : $\leq 10\text{m}\Omega$ |
| Insulation resistance | : $>10\text{M}\Omega$ |

Materials

| | |
|-----------------|----------|
| Pin contact | : brass |
| Contact plating | : gold |
| Male insert | : nylon |
| Ring nut | : nylon |
| O-ring | : rubber |

Specification of cable

| | | |
|----------------|-----|-----|
| Matrial Jacket | PVC | PUR |
|----------------|-----|-----|

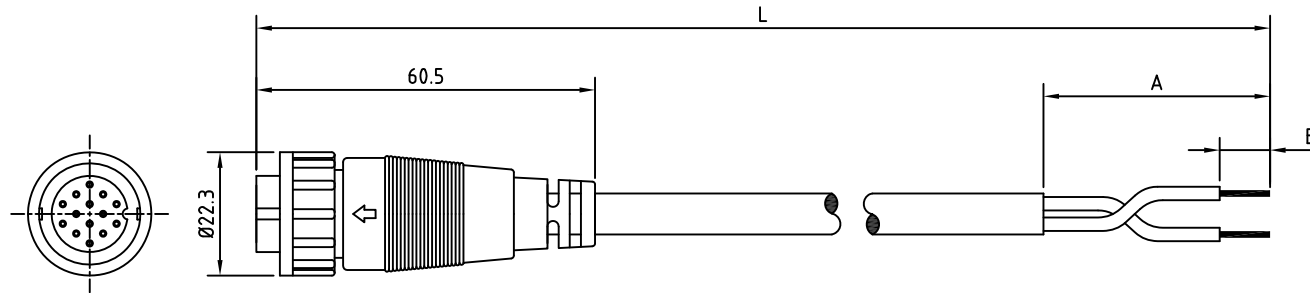

RoHS
LEAD FREE

All Connectors

www.allconnectors.eu | info@allconnectors.eu
Tel. +49 (0)711 / 358 110 20 | Fax +49 (0)711 / 358 110 25

| | | | | | |
|------|---------------------------|------|------------|----------|--------|
| ITEM | CIRCULAR CONNECTOR TYPE C | DATE | 10-21-2010 | PART NO. | D214F1 |
| | | DWN | GINA | REV. | 0 |
| | | CHK | KATY | | |
| | | UNIT | MM | | |

NOTE: REV.0 NEW