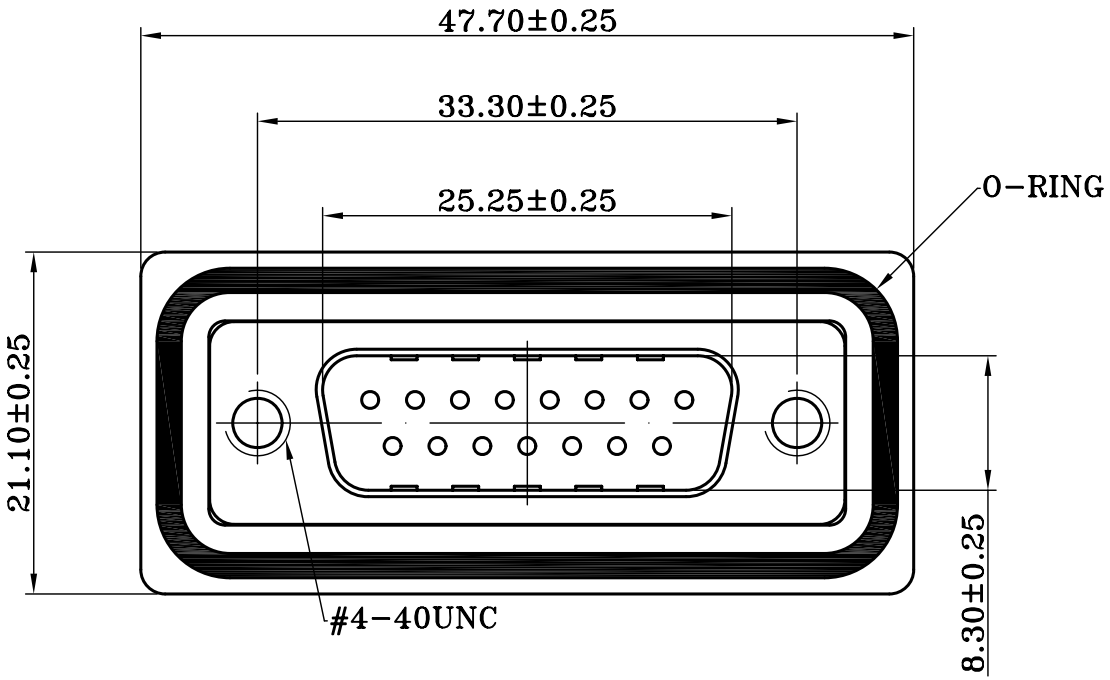

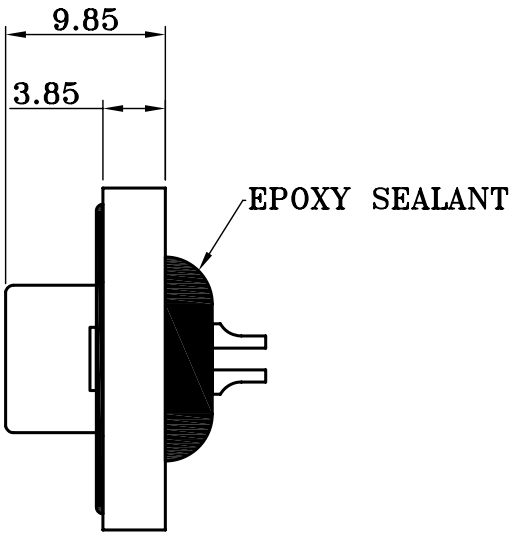

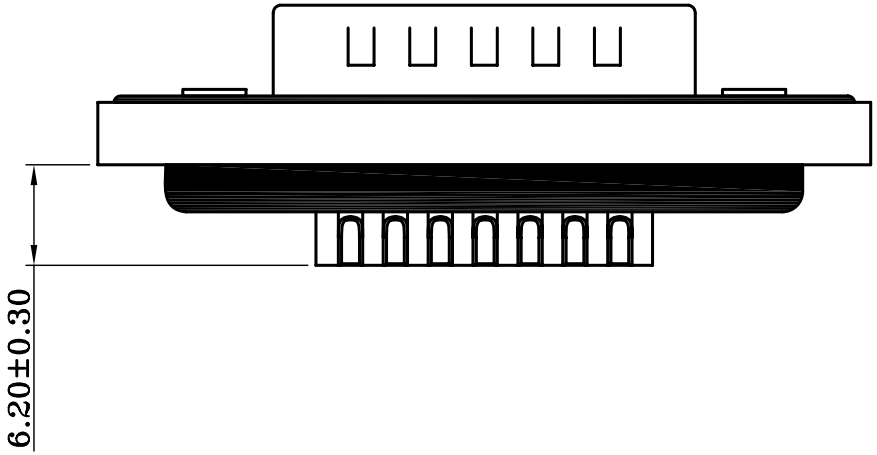

MATERIALS AND FINISH
SHELL : STEEL MATERIAL, FRONT SHELL TIN FINISHED
BACK SHELL TIN FINISHED
DIMPLES ON PLUG ONLY
INSULATOR : PBT THERMOPLASTIC, 30% GLASS FILLED,
UL 94V-0 RATED, BLACK COLOR
CONTACT MATERIAL : COPPER ALLOY
CONTACT FINISH : FULL GOLD FLASH

ELECTRICAL CHARACTERISTICS
CONTACT CURRENT RATING : 5.0 AMPS
CONTACT RESISTANCE : 30 MILLIOHMS MAX.
DIELECTRIC WITHSTANDING VOLTAGE : 1000 V AC MIN.
INSULATION RESISTANCE : 5000 MEGAOHMS MIN.
TEMPERATURE RATING : -55°C ~ +105°C
DEGREE OF PROTECTION: ACCORDING TO IEC529-IP67

REV	CONTENTS	DATE

TOLERANCES
X. ±0.40
.X ±0.30
.XX ±0.20
.XXX ±0.10
X°. ±0.30
.X° ±0.20
.XX° ±0.10

DRAWED	HAO			DWG NO:	WDS0-15MTBO		
CHKD	HAO						
APPD	JORDAN			CUSTOMER	--		
MATETIAL	--	SCALE	2:1	SIZE	A4	REV	001
FINISH	--	UNITS	mm	DATE	2008/08/28		

All Connectors
www.allconnectors.eu | info@allconnectors.eu
Tel. +49 (0)711 / 358 110 20 | Fax +49 (0)711 / 358 110 25